



Gel: UL 94-HB

Degree of protection: IPX8

Operating temperature **90°**

Installation temperature: -40°C / +50°C

Fully submersible

Can be used underground




MAKE EVERY CONNECTION SUBMERSIBLE

Gel Cover Line - OHM and BAR

For **extending** & **branching** flexible cables






Suitable for permanent submersion and burying, re-enterable and reusable. Perfect for outdoor lighting.

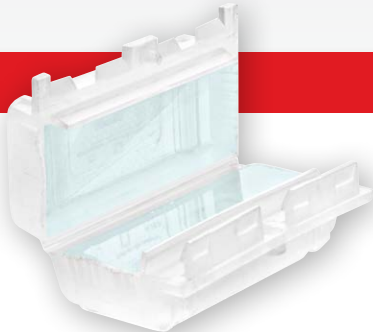

61 x 35 x 28mm

OHM (Green version still available: (Mammut) Gel Cover 4)





- For 2 pole connections (up to 15 amp using strip connector or 32 AMP using the new Wago 221 connector)
- Up to 4mm straight through and 1.5mm branch
- Accepts up to two 'New Wago 221' 2 pole Connectors up to 1.5mm

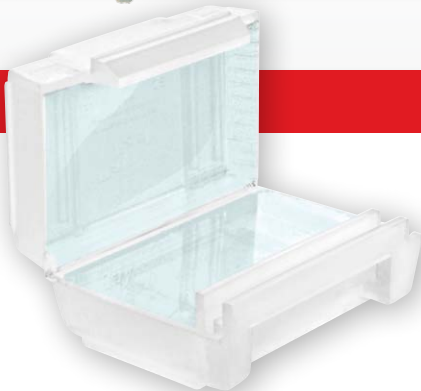

63 x 41 x 28mm

BAR (Green version still available: (Mammut) Gel Cover 6)

- For 3 pole connections (up to 30 amp using strip connector or 32 AMP using the new Wago 221 connector)
- Up to 6mm straight through and 2.5mm branch
- Accepts up to three 'New Wago 221' 3 pole Connectors up to 1.5mm



**Ray
tech**
Leader in Quality

For information and enquiries: www.ghlucas.co.uk sales@ghlucas.co.uk

tel: 0161 359 3407 fax: 0161 359 3408

GH Lucas & Co. Ltd, PO Box 754, Altrincham, Cheshire WA15 5DX

View and download the full catalogue at: www.ghlucas.co.uk

LUCAS



Pre-filled
with gel!

No need
to fill

Brick Light example 1:



Brick Light example 2:

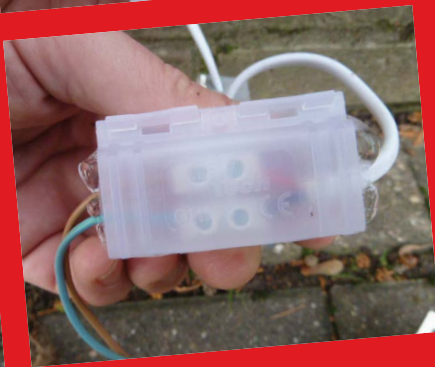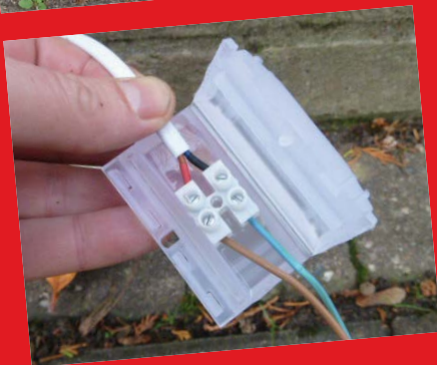

Watch the demo video
online: www.ghlucas.co.uk



JOINTS

PRE-FILLED WITH GEL
for free connections



EN50393

Electrical performance: CEI EN 50393 • CEI 20-33
(with testing under water head and water
between the cable cores)
Class 2 in accordance with CEI 64-8.

Gel: US

Operating temperature





Installation temperature:
-40°C / +50°C

LV


Gel Cover Line

Accessory pre-filled with gel for straight connections for the protection, safety and covering of electrical connections using strip connectors or alternatives

- For 3 x 1 to 6 mm² cables or 3 insulated wires
- For civil and industrial connections
- To put household systems in order
- Also for underwater use
- Non-toxic and with no shelf life
- Ready to use

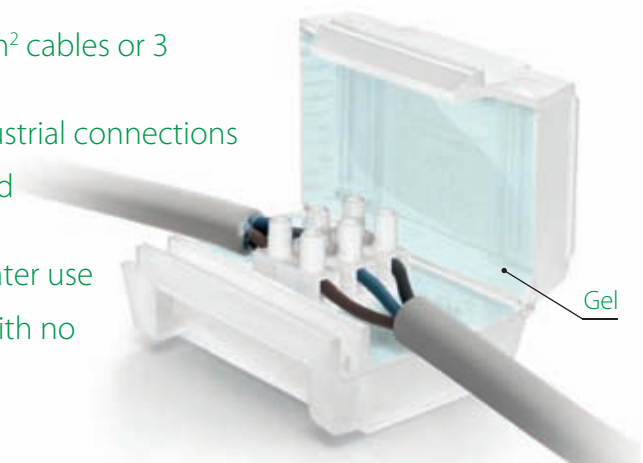


OHM & BAR



Product	Housed connectors type	Pieces per package	Package type	Dimensions A x B x C (mm)
OHM				
OHMp11	2 from 4 mm ²	11	box	61 x 35 x 28
BAR				
BARp9	3 from 4 mm ² / 6 mm ²	9	box	63 x 41 x 28



Mammut Gel Cover



Product	Housed connectors type	Pieces per package	Package type	Dimensions A x B x C (mm)
Gel Cover 4				
Mammut Gel Cover	2 from 4 mm ²	6	box	61 x 35 x 28
Gel Cover 6				
Mammut Gel Cover 6	3 from 4 mm ² / 6 mm ²	8	box	63 x 41 x 28

No flame propagation. CEI 20-35 • IEC 60332-1 • HD405-1 (as applicable) **Casing mix:** UL 94-V2